

FORM PTO-1390 (Modified)
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES

RCA88785

DESIGNATED/ELECTED OFFICE (DO/EO/US)

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

CONCERNING A FILING UNDER 35 U.S.C. 371

09/581193

INTERNATIONAL APPLICATION NO.
PCT/US98/18087INTERNATIONAL FILING DATE
01 September 1998PRIORITY DATE CLAIMED
12 December 1997

TITLE OF INVENTION

RETRIEVING STORED DATA FROM A BASE UNIT OF A MULTI-LINE WIRELESS WIRELESS PHONE
SYSTEM

APPLICANT(S) FOR DO/EO/US

KUMAR RAMASWAMY AND PAUL GOTHARD KNUTSON

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:


1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ A copy of the International Search Report (PCT/ISA/210).
8. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☒ Certificate of Mailing by Express Mail
20. ☒ Other items or information:

RETURN RECEIPT POSTCARD

CANNED, # 14

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.53) 09/581193		INTERNATIONAL APPLICATION NO. PCT/US98/18087		ATTORNEY'S DOCKET NUMBER RCA88785	
21. The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) : <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$970.00 <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$840.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$690.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$670.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$96.00 ENTER APPROPRIATE BASIC FEE AMOUNT =				CALCULATIONS PTO USE ONLY	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).				\$840.00	
				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	13 - 20 =	0	x \$18.00	\$0.00	
Independent claims	4 - 3 =	1	x \$78.00	\$78.00	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$918.00	
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). <input type="checkbox"/>				\$0.00	
SUBTOTAL =				\$918.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00	
TOTAL NATIONAL FEE =				\$918.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL FEES ENCLOSED =				\$918.00	
				Amount to be: refunded	\$
				charged	\$
<input type="checkbox"/> A check in the amount of _____ to cover the above fees is enclosed.					
<input checked="" type="checkbox"/> Please charge my Deposit Account No. 07-0832 in the amount of \$918.00 to cover the above fees. A duplicate copy of this sheet is enclosed.					
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. 07-0832 A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO:					
JOSEPH S. TRIPOLI - PATENT OPERATIONS THOMSON MULTIMEDIA LICENSING, INC. PO BOX 5312 - 2 INDEPENDENCE WAY PRINCETON, NJ 08543-5312			SIGNATURE  Frank Y. Liao NAME 40,065 REGISTRATION NUMBER 6/8/00 DATE		

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Kumar Ramaswamy et al.
Int'l Appln. No : PCT/US98/18107
Filed : Herewith
For : RETRIEVING STORED DATA FROM A BASE UNIT OF
A MUTLI-LINE WIRELESS PHONE SYSTEM

PRELIMINARY AMENDMENT

Honorable Assistant Commissioner for Patents
Washington, D.C. 20231

Dear Sir:

In the US national phase application of PCT/US98/18107 filed
herewith, please enter the following amendments:

In the Claims

Please amend the claims as follows:

In Claim 1, line 1, delete [(100)],
line 2, delete [(110)] and [(111, 112)],
line 3, delete [(120)] and [(120_i)],
line 4, delete [(121, 122)] and [(110)],
line 6, delete [(200)],
line 7, delete [(120_i)],
line 9, delete [(110)] and [(120_i)],
line 11, delete [(120_i)],
line 12, delete [(200)],
line 13, delete [(120_i)],
line 20, delete [(120_i)],
line 21, delete [(251,252)] and [(200)],
line 24, delete [(253,254)].

In Claim 2, line 2, delete [(120)],
line 4, delete [(200)].

In Claim 3, line 1, delete [(118)].

0054194500
ELECTRONIC

In Claim 4, line 1, delete [(110)] and [(118)].

In Claim 5, line 3, delete [(110)],
line 9, delete [(118)].

In Claim 6, line 1, delete [(110)],
line 2, delete [(120_i)],

In Claim 9, line 1, delete [(110)] and [(110)],
line 2, delete [(111,112)], [(123)] and (120_i),
line 3, delete [(121,122)],
line 7, delete [(200)],
line 8, delete [(120_i)],
line 17, delete [(120_i)],
line 24, delete [(120_i)],
line 25, delete [(251,252)] and (200)],
line 28, delete [(253,254)].

In Claim 11, line 1, delete [(110)] and [(120)],
line 2, delete [(120_i)], [(121,122)] and [(110)],
line 3, delete [(111,112)].
line 7, delete [(120_i)],
line 9, delete [(118)],
line 13, delete [(200)],
line 14, delete [(120_i)],
line 21, delete [(120_i)], [(251,252)] and (200)],
line 22, delete [(251,252)] and (200)],
line 25, delete [(253,254)].

In Claim 13, line 1, delete [(100)],
line 2, delete [(110)] and [(111, 112)],
line 3, delete [(120)] and [(120_i)],
line 4, delete [(121,122)],
line 5, delete [(110)],
line 7, delete [(110)] and [(120_i)],
line 9, delete [(120_i)].

0954193 4400
00377 6671850

REMARKS

The above claims have been amended to remove reference indicia. No new matter has been added.

No fee is believed to be incurred by virtue of this amendment. However, if a fee is incurred on the basis of this amendment, please charge such fee against deposit account 07-0832.

Respectfully Submitted,
Kumar Ramaswamy et al.

By: Frank Y. Liao 6/8/00
Frank Y. Liao, Attorney
Registration No. 40,065
(609) 734-9497

THOMSON multimedia Licensing Inc.
PO Box 5312, 2 Independence Way
Princeton, NJ 08543-5312

0054191 E6T1850

21PMB

09/581193

EXP MAIL: EL498034695 US
WO 99/31825

527 Rec'd PCT/PTC 08 JUN 2000

PCT/US98/18087

**RETRIEVING STORED DATA FROM A BASE UNIT OF A MULTI-
LINE WIRELESS PHONE SYSTEM**

5 **BACKGROUND OF THE INVENTION**

Field of the Invention

The present invention relates to multi-line wireless telephone systems and, in particular, to data transmission in a time-division multiplexed (TDM) wireless telephone system.

10 **Description of the Related Art**

The use of telephones and telephone systems, including wireless telephone systems, is widespread. In wireless telephone systems, a cordless or wireless telephone handset unit communicates via either analog or digital radio signals with a base unit, which is typically
15 connected via a standard telephone line to an external telephone network. In this manner, a user may employ the wireless handset to engage in a telephone call with another user through the base unit and the telephone network.

Multi-line wireless telephone systems are in use in various
20 situations, such as businesses with many telephone users. Such systems employ a handset that communicates with up to N handsets simultaneously, typically with digital communications schemes, such as a spread-spectrum, time division multiple access (TDMA). In a TDMA system, a single RF channel is used, and each handset transmits
25 and receives audio data packets as well as non-audio data packets during dedicated time slices or slots within an overall TDMA cycle or epoch. It is desirable to provide various features, such as private

09581193 114500

branch exchange (PBX) features and capabilities, in a multi-line wireless telephone system. It is also desirable to transmit or retrieve non-audio data over the RF channel. For example, a handset may wish to retrieve certain stored data, such as voice mail or caller ID data, which is stored in the base unit or in a device coupled to the base unit.

European Patent Application No. 0 399 611, filed 22.05.90, describes a communications system for data transmission over a time division duplex frequency channel, in which TDMA is used for forward and reverse transmissions between a primary and secondary station.

SUMMARY

A wireless telephone system comprising a base unit and a plurality of wireless handsets. The base unit has a base transceiver and a memory for storing stored information. Each handset has a handset transceiver for establishing a data link and an audio link over a shared RF channel with the base unit via the base transceiver, wherein the data link is for transmitting signaling information and the audio link is for transmitting voice data for a real-time telephone conference. The handset requests from the base unit certain stored information. In response, the base unit retrieves the requested stored information from the memory and transmits the stored information to the handset via the audio link.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of TDMA multi-line wireless telephone system, in accordance with an embodiment of the present invention; and

Fig. 2 is a schematic representation of the TDMA slot structure used in the TDMA scheme of the system of Fig. 1, in accordance with an embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to Fig. 1, there is shown a block diagram of TDMA multi-line wireless telephone system 100, in accordance with an embodiment of the present invention. TDMA system 100 comprises a base unit 110, which has receiver and transmitter units 112 and 111, respectively, and is coupled to external telephone network 116 via telephone line(s) 115. Base unit 110 has a memory or storage device 118, such as a RAM or hard disk drive, for storing stored data. System 100 also comprises N wireless handsets $120_1, 120_2, \dots, 120_N$. Each has a transmitter and receiver unit (transceiver), such as transmitter 121 and receiver 122 of handset 120_1 . At any given time, some number (or none) of the handsets are operating or off hook (i.e., in the process of conducting a telephone call). System 100 thus provides a wireless network between the base station 110 and each handset 120_i ($1 \leq i \leq N$). In one embodiment, system 100 comprises 4 handsets 120_1 - 120_4 , all of which may be active simultaneously. In another embodiment, system 100 comprises a different number of handsets, e.g. $N=12$, of which up to 8 can be active or operational at a time.

In one embodiment, the present invention comprises a TDMA system for connecting multiple transceivers to a base station over a single RF channel. In particular, system 100 employs a digital TDMA scheme, as described in further detail below, which allows power to be efficiently used since each operating handset is "off" (i.e., not transmitting or receiving data, and thus not using as much battery power) during most portions of the TDMA epoch, and is only "on" during its own time slices or slots. In another embodiment, a handset

powers off by switching off power to at least its CPU and transceiver (receiver and transmitter) units, while leaving powered on only a clock and associated timer or watchdog circuitry sufficient to wake up the CPU at a predetermined slot time.

Referring now to Fig. 2, there is shown a schematic representation of the TDMA slot structure 200 used in the TDMA scheme 200 of the system of Fig. 1, in accordance with an embodiment of the present invention. System 100 employs a TDMA epoch having structure 200, which is illustrated assuming 12 total handsets 120_1-120_{12} , of which 8 can be active or operational at a time, e.g. handsets 120_1-120_8 . TDMA epoch structure 200 comprises a number of rows and columns. Each row of TDMA structure 200 represents a 2ms field of digital data, and is either even or odd and grouped in a pair with an odd or even, respectively, row or field. TDMA epoch structure 200 is a 48ms epoch.

In normal mode of operation, each field comprises nine total packets: a (non-audio) data packet in the first column (either transmitted from the base or from a handset) and eight audio packets, grouped in 4 pairs of two. Each such pair of audio packets in a row includes one packet (time slot) of base audio transmission (to a given handset from base unit 110) and one packet of handset audio transmission (from the given handset to the base). Thus, within each epoch, there is allocated to each handset one pair of data packet slots and several pairs of audio packet slots.

The data packet slots are used to establish a "data link" with each respective handset, and the audio packet slots are used to establish an "audio link" with each respective handset. The data links together constitute the system's data channel, while the audio links constitute the system's audio

channel. In other words, the first column of TDMA epoch structure 200 corresponds to the data channel (data links), and the remaining columns correspond to the audio channel (audio links).

The data link for a given handset is used to transmit, via data packets, non-audio data referred to generally herein as signaling information. Each data packet is a set of data transmitted either to a given handset from the base unit or vice-versa, during a discrete time slot during which time no other handsets receive or transmit data over the system's data channel. These data packets may contain various types of data, such as synchronization data or words with time stamp information transmitted to a handset in sleep mode, caller ID information, incoming call information, telephone number being dialed by the handset, and the like. The signaling information conveyed by the data link is used to setup calls, inform the handset of incoming calls, maintaining the communication links between the handsets and base, and the like.

Voice data, i.e. audio packets containing audio data for a real-time telephone conversation, is transmitted over the audio link for a given handset. The bandwidth for the audio link for a handset is much higher than the bandwidth for the data link. This is because, within each epoch, there is allocated to each handset one pair of data packet slots and several pairs of audio packet slots. For example, for $N=12$ total handsets 120_1-120_{12} with up to 8 off hook at a time, there are 12 audio packet pairs per handset per epoch, compared to 1 data packet pair per handset per epoch, for an audio channel (or link) bandwidth 12 times greater than the data channel (or link) bandwidth. The audio packets contain digitized (and possibly compressed) voice information.

Thus, for example, row pair 0 comprises an even row and odd row. In the even row, the base transmits data in the first time slot (slot 251), to one of the 12 handsets, e.g. handset 120₁.

There is one row pair in epoch 200 for each handset, so that each handset can receive and transmit data to base unit 110 once per epoch. After the first data slot 251, assuming handset 120₁ is operational (off hook), an audio packet is transmitted to handset 120₁ in audio packet slot 253, then an audio packet is transmitted by handset 120₁ to base unit 110 in audio packet slot 254, and so on for 3 of the other handsets until the end of the field or row. In the odd row for row pair 0, data slot 252 is used to receive data transmitted from handset 120₁ to base unit 110, and audio packets are transmitted for the remaining 4 active handsets. In row pairs 1-11, the same sequence occurs, except the data packets are to and from different handsets than for row pair 0.

It is desirable for a handset user to be able to retrieve stored data which is stored in memory 118 of the base unit 110. This information is in addition to signaling data typically transmitted via the data link and voice data typically transmitted via the audio link. Stored data includes all stored/backed up information that is available in the base unit. This information may represent voice, data, or other service information. For example, the stored data may be a voice mail information, caller ID information, or other service information.

Such stored information is typically requested by a handset via its data link, since the request is itself a type of signaling information. Because the stored data is not audio data pertaining to a concurrent telephone call, it could be transmitted via the data link. However,

this may be impractical or undesirable because the bandwidth of the data link is lower than that of the audio link. Therefore, in the present invention, when stored information is requested by a handset, the audio link is temporarily converted to a "stored data" link, voice data transmission is temporarily halted (muted or interrupted), and stored data is transferred to the handset during that handset's audio data slots. This allows the stored data to be transmitted at a much higher rate to the handset than if the lower-bandwidth data link were used.

In the present invention, first, a handset 120_i requests stored data from base unit 110. Base unit 110 then fetches the stored data from memory 118, and combines the stored data into the voice link for handset 120_i as digital information. Since handset 120_i has knowledge about its request, it knows what type of stored data to expect on its audio link, and thus knows which type of decoding or processing to use when the stored information is received.

For example, if a voice mail message is to be retrieved, handset 120_i transmits an appropriate request for the voice mail message to base unit 110 via its data link. Base unit 110 retrieves the stored voice mail data, which may be stored in compressed format for efficient use of memory 118. This compressed, digital information representing the requested voice mail message is then transmitted to handset 120_i via its audio link, instead of its data link. Handset 120_i then processes the stored data received via its audio link through its voice decompression engine. On the other hand, if caller ID information is retrieved, then the data coming over the audio link is appropriately processed and displayed on the handset's display.

The present invention, therefore, creates an asymmetrical link for information retrieval in a wireless system so that efficient use of the available bandwidth is possible.

In an alternative embodiment, the audio link is used to retrieve stored data only if it is not already in use. In this case, the data link is used by a handset to request retrieval of stored data.

If the audio link is in use by the handset, then the data link is used to transmit the stored data to the handset. However, if the audio link is not in use, then the audio link is used instead as a "stored data" link to transmit the stored data at a higher rate.

In an alternative embodiment, the stored information retrieved by a handset is not actually stored in base unit 110, but is stored in a device external to base unit 110, such as an external PC or storage device, which is coupled by a suitable interface to base unit 110. In this case, the stored information is retrieved by the handset from the storage device, via base unit 110, and the storage device is considered to be the same as memory 118, whether located in base unit 110, directly accessible by base unit 110, or accessible by base unit 110 via some interface. For purposes of this application, therefore, any information stored either directly in base unit 110 or in a device functionally coupled thereto such that the base unit is able to provide the stored data upon request to a handset, is considered to be information stored in base unit 110, since from the point of view of a handset, the request is made of base unit 110 and the information provided by base unit 110 appears to be stored in base unit 110.

One skilled in the art will recognize that the wireless system described above according to the principles of the invention may be a

cellular system where base unit 110 represents a base station serving one of the cells in a cellular telephone network.

In an alternative embodiment, instead of a handset retrieving over the audio link data actually stored in memory 118, the handset may wish to retrieve data from a data source accessible to the base unit 110. For example, base unit 110 may receive via an external line a modem signal containing data. In this case, the handset may be coupled to a telephone data port of a computer, for example. The handset requests from base unit 110 to be connected to a data source or channel, such as that provided by the modem. Base unit 110 then transmits the data decoded from the modem, to the handset via the audio link.

SUBSTITUTE SHEET

CLAIMS

1. A wireless telephone system (100), comprising:
- (a) a base unit (110) having a base transceiver (111, 112); and
 - (b) a plurality of wireless handsets (120), each handset (120_i) comprising a handset transceiver (121, 122) for establishing with the base unit (110) via the base transceiver a time-division multiple access (TDMA) data link and a TDMA audio link, in accordance with a TDMA epoch (200) allocating exclusive data and audio packet time slots to each handset (120_i), wherein the data link is for transmitting signaling information and the audio link is for transmitting voice data for a real-time telephone call, wherein the base unit (110), upon request from a handset (120_i) for data from a data source, retrieves the requested data from the data source and transmits the retrieved data to the handset (120_i) via the audio link, wherein:
the epoch (200) has a plurality of transmit and receive data row pairs, one such row pair for each handset (120_i), wherein each row of a row pair comprises an even row comprising a transmit data time slot for the respective handset and a plurality of transmit and receive audio packet time slots for half of the maximum number of the plurality of handsets which may be communicating at a time, and an odd row comprising a receive data time slot for the respective handset and a plurality of transmit and receive audio packet time slots for the other half of the maximum number of the plurality of handsets which may be communicating at a time; and
each handset (120_i) receives and transmits data packets via receive and transmit data packet slots (251, 252) only once during each epoch (200), during the transmit and receive data row pair for each said handset, and, if the handset is communicating with the base unit, said each handset receives and transmits audio packets during respective transmit and receive audio packet time slots (253, 254) of each row pair of the epoch.
2. The system of claim 1, wherein:
the plurality of handsets (120) comprises 12 handsets, 8 of which may be communicating at a time;

SUBSTITUTE SHEET

the epoch (200) comprises 12 data row pairs, one data row pair for each handset; and each row pair comprises 8 transmit and receive audio packet time slot pairs for audio communications for the communicating handsets.

3. The system of claim 1, wherein the data source is a memory (118) for storing data and the requested data is stored data stored in the memory.

4. The system of claim 3, wherein the base unit (110) comprises the memory (118).

5. The system of claim 3, wherein the base unit (110) is coupled to an external computer comprising the memory (118).

6. The system of claim 3, wherein the base unit (110) transmits the stored information to the handset (120) via the audio link only if the handset is not currently using the audio link to transmit real-time telephone conference voice data, and transmits the stored information to the handset via the data link if the handset is currently using the audio link to transmit real-time telephone conference voice data.

7. The system of claim 3, wherein the stored information is one of stored caller ID information and stored compressed voice mail message data.

8. The system of claim 7, wherein the handset requesting the stored information processes the stored information upon receipt in accordance with the nature of the stored information.

9. In a wireless telephone system (100) comprising a base unit (110) having a base transceiver (111, 112) and a plurality of wireless handsets (120), each handset (120) comprising a handset transceiver (121, 122), a method comprising the steps of:

- (a) establishing, with each handset via its handset transceiver, a time-division multiple access (TDMA) data link with the base unit via the base transceiver, and, with each handset that is communicating with the base unit, a TDMA audio link with the base unit via

the base transceiver, in accordance with a TDMA epoch (200) allocating exclusive data and audio packet time slots to each handset (120), wherein the data link is for transmitting signaling information and the audio link is for transmitting voice data for a real-time telephone call;

- (b) requesting, with the handset, from the base unit, data from a data source;
- (c) retrieving, with the base unit, the requested data from the data source in response to the request; and
- (d) transmitting the retrieved data from the base unit to the handset via the audio link, wherein:

the epoch (200) has a plurality of transmit and receive data row pairs, one such row pair for each handset (120), wherein each row of a row pair comprises an even row comprising a transmit data time slot for the respective handset and a plurality of transmit and receive audio packet time slots for half of the maximum number of the plurality of handsets which may be communicating at a time, and an odd row comprising a receive data time slot for the respective handset and a plurality of transmit and receive audio packet time slots for the other half of the maximum number of the plurality of handsets which may be communicating at a time; and each handset (120) receives and transmits data packets via receive and transmit data packet slots (251, 252) only once during each epoch (200), during the transmit and receive data row pair for each said handset, and, if the handset is communicating with the base unit, said each handset receives and transmits audio packets during respective transmit and receive audio packet time slots (253, 254) of each row pair of the epoch.

10. The method of claim 9, wherein the data source is a memory for storing data and the requested data is stored data stored in the memory.

11. A base unit (110) for communicating with a plurality of wireless handsets (120), each handset (120) comprising a handset transceiver (121, 122), the base unit (110) comprising:

- (a) a base transceiver (111, 112) for establishing a time-division multiple access (TDMA) data link with each handset via the base transceiver, and, with each handset that is

communicating with the base unit, a TDMA audio link via the base transceiver, in accordance with a TDMA epoch (200) allocating exclusive data and audio packet time slots to each handset (120), wherein the data link is for transmitting signaling information and the audio link is for transmitting voice data for a telephone call; and

(b) a memory (118) for storing stored information, wherein the base unit, upon request from the handset for stored information stored in the memory, retrieves the requested stored information from the memory and transmits the stored information to the handset via the audio link, wherein:

the epoch (200) has a plurality of transmit and receive data row pairs, one such row pair for each handset (120), wherein each row of a row pair comprises an even row comprising a transmit data time slot for the respective handset and a plurality of transmit and receive audio packet time slots for half of the maximum number of the plurality of handsets which may be communicating at a time, and an odd row comprising a receive data time slot for the respective handset and a plurality of transmit and receive audio packet time slots for the other half of the maximum number of the plurality of handsets which may be communicating at a time; and

each handset (120) receives and transmits data packets via receive and transmit data packet slots (251, 252) only once during each epoch (200), during the transmit and receive data row pair for each said handset, and, if the handset is communicating with the base unit, said each handset receives and transmits audio packets during respective transmit and receive audio packet time slots (253, 254) of each row pair of the epoch.

12. The base unit of claim 11, wherein the data source is a memory for storing data and the requested data is stored data stored in the memory.

13. A wireless telephone system (100), comprising:

- (a) a base unit (110) having a base transceiver (111, 112); and
- (b) a plurality of wireless handsets (120), each handset (120) comprising a handset transceiver (121, 122) for establishing a data link and an audio link with the base unit (110) via the base transceiver, wherein the data link is for transmitting signaling

SUBSTITUTE SHEET

information and the audio link is for transmitting voice data for a real-time telephone call, wherein the base unit (110), upon request from a handset (120) for non-voice data from a data source, retrieves the requested data from the data source and transmits the retrieved data to the handset (120) via the audio link if the handset is not currently using the audio link to transmit real-time telephone conference voice data and transmits the stored information to the handset via the data link otherwise.

SUBSTITUTE SHEET

~~12~~
15ABSTRACT OF THE DISCLOSURE

A wireless telephone system comprises a base unit and a plurality of wireless handsets. The base unit has a base transceiver and a memory for storing stored information. Each handset has a handset transceiver for establishing a data link and an audio link with the base unit via the base transceiver, wherein the data link is for transmitting signaling information and the audio link is for transmitting voice data for a real-time telephone call. The handset requests from the base unit certain stored information. In response, the base unit retrieves the requested stored information from the memory and transmits the stored information to the handset via the audio link.

10

00544664850

1/2

100

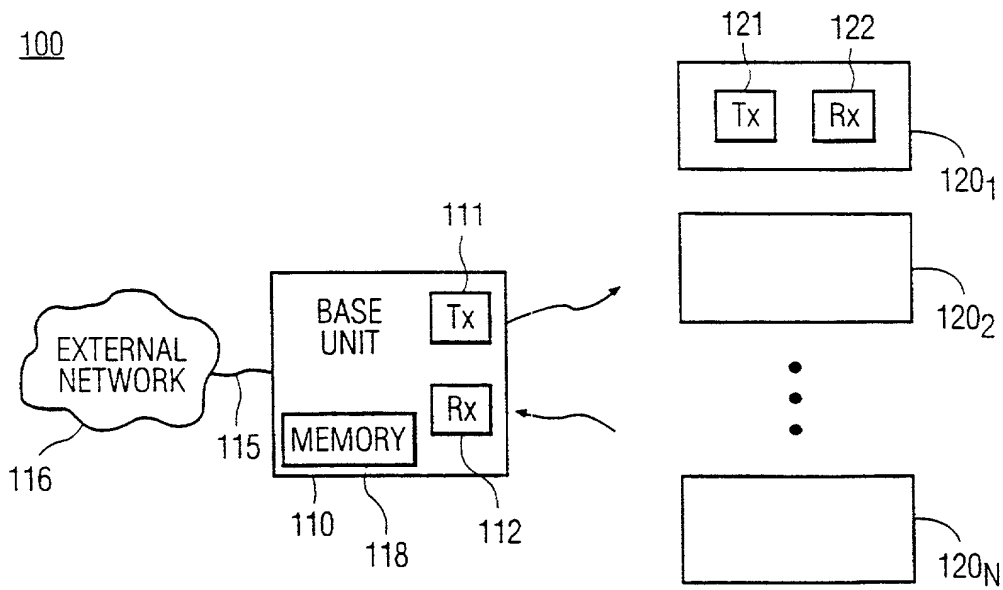


FIG. 1

200

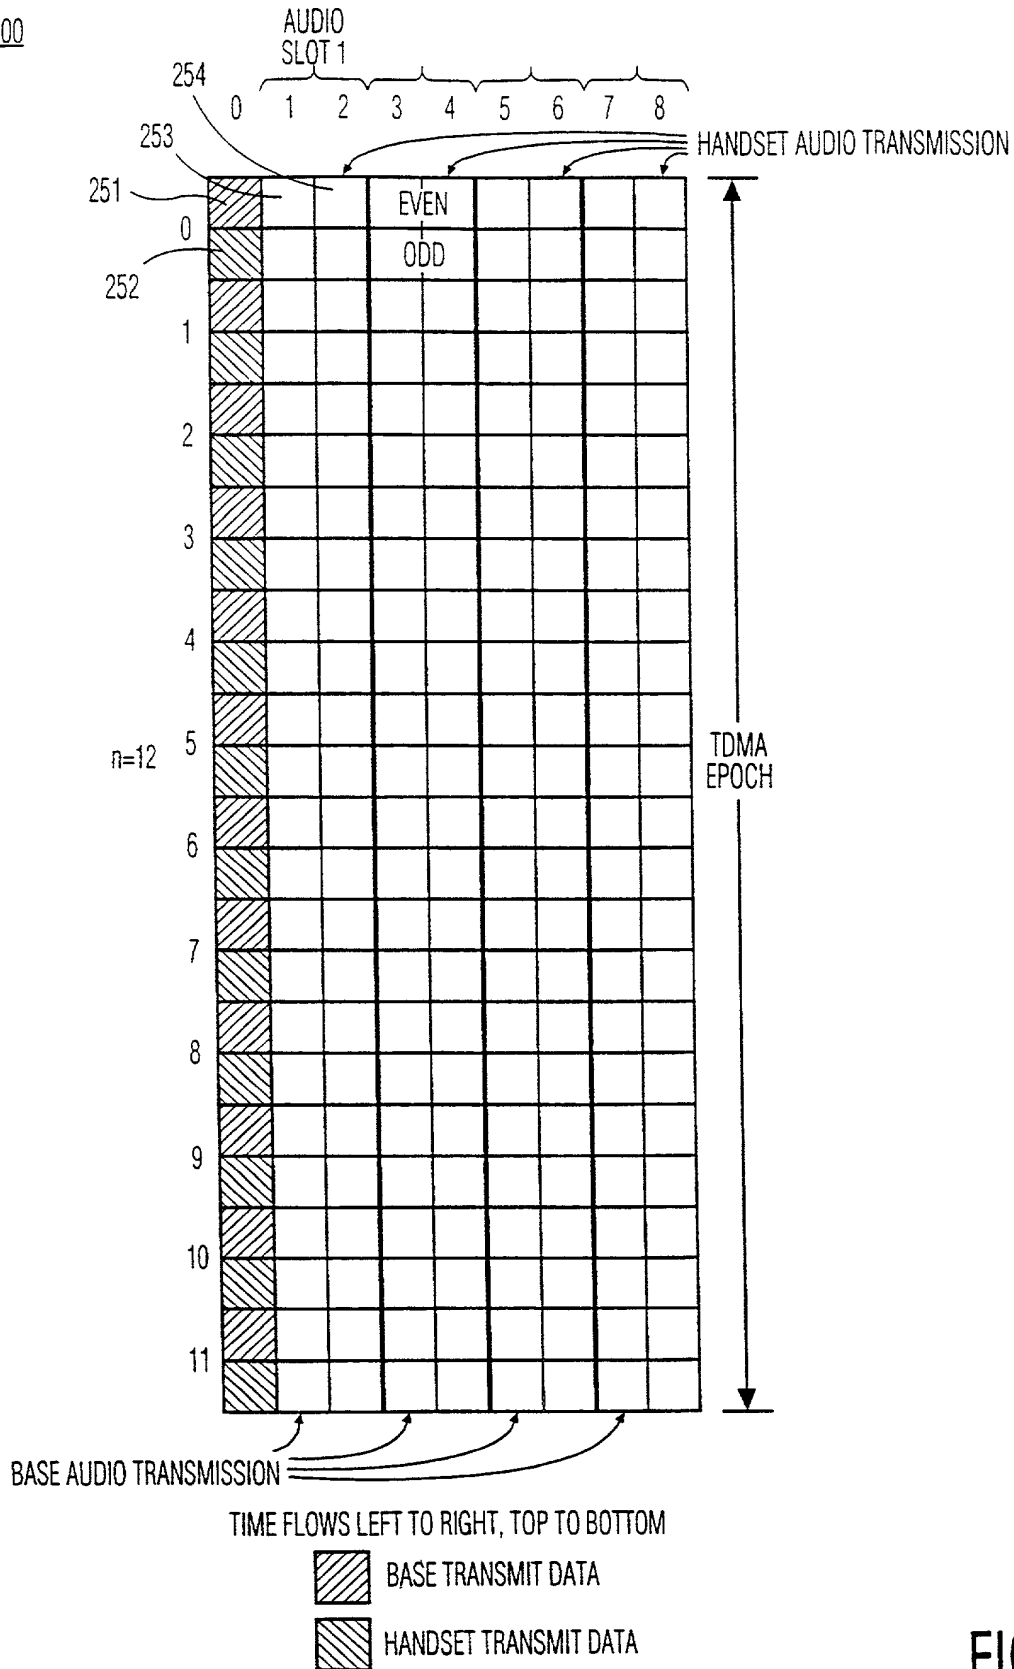


FIG. 2

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) <input type="checkbox"/> Declaration Submitted with Initial Filing OR <input checked="" type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	Attorney Docket Number	RCA 88785
	First Named Inventor	Kumar Ramaswamy
	COMPLETE IF KNOWN	
	Application Number	
	Filing Date	
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

RETRIEVING STORED DATA FROM A BASE UNIT OF A MULTI-LINE WIRELESS PHONE SYSTEM

the specification of which (Title of the Invention)
☐ is attached hereto
OR
☒ was filed on (MM/DD/YYYY) **September 1, 1998** as United States Application Number or PCT International

Application Number **PCT/US98/18087** and was amended on (MM/DD/YYYY) **January 19, 2000** (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	
60/069,555	December 12, 1997	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO:

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
PCT/US98/18087	September 1, 1998	

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☒ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number
JOSEPH S. TRIPOLI	26,040		
JOSPEH J. LAKS	27,914		
FRANK Y. LIAO	40,065		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to:

☐ Customer Number or
Bar Code Label

OR ☒ Correspondence address below

Name	Joseph S. Tripoli - Patent Operations				
Address	THOMSON multimedia Licensing Inc.				
Address	PO Box 5312				
City	Princeton	State	NJ	ZIP	08540
Country	US	Telephone	609-734-9497	Fax	609-734-9700

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))		Family Name or Surname					
KUMAR		RAMASWAMY					
Inventor's Signature	Kumar Ramaswamy		Date	10 Oct 2000			
Residence: City	Indianapolis	State	IN	Country	US	Citizenship	IN
Post Office Address	9417 College Drive #B						
Post Office Address	Indianapolis, Indiana 46240 US						
City		State		ZIP		Country	

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → +

PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
OMB control number.

+

DECLARATION

ADDITIONAL INVENTOR(S) Supplemental Sheet Page 1 of 1

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

PAUL GOTHARD

KNUTSON

Inventor's
Signature

[Handwritten Signature]

October 11, 2000
Date

Residence: City

Indianapolis

State

IN IN

Country

US

Citizenship

US

Post Office Address

148 South Emerson Avenue

Post Office Address

Indianapolis, Indiana 46219US

City

State

ZIP

Country

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Inventor's
Signature

Date

Residence: City

State

Country

Citizenship

Post Office Address

Post Office Address

City

State

ZIP

Country

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Inventor's
Signature

Date

Residence: City

State

Country

Citizenship

Post Office Address

Post Office Address

City

State

ZIP

Country

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

+

00577 867360

2-00

X